



HP UNIVERSAL HEAVYWEIGHT COATED PAPER

Look to this economical printing material, ideal for a variety of medium ink-density graphics and technical applications including presentations, indoor signs, and posters that are frequently replaced.



Accomplish more with consistent results every time

From working comps and design proofs to POP signage and special event posters, see high-quality, consistent image quality print to print and roll to roll.

Make the economical choice for everyday prints

Meet your everyday printing needs and enjoy consistent, high-quality results with this economical heavyweight matte coated paper.

Gain added flexibility with this FSC™ certified paper

Use this high-quality printing material across a broad range of HP Designjet printers. You gain added flexibility with this HP paper, designed with the environment in mind. HP Universal Heavyweight Coated Paper is an FSC™ certified paper, supporting the development of responsible forest management worldwide.

Target customers


- Architects
- Engineers
- Geographic Information Systems (GIS) professionals
- Graphic designers
- Print service providers

Benefits

- Consistent, high-quality results
- Cost-effective for everyday use
- Broad HP Designjet printer compatibility
- FSC™ certified paper
- Recyclable through commonly available recycling programs

The HP Designjet printing system— the complete solution

HP Designjet printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to ensure reliable, consistent results with every print.

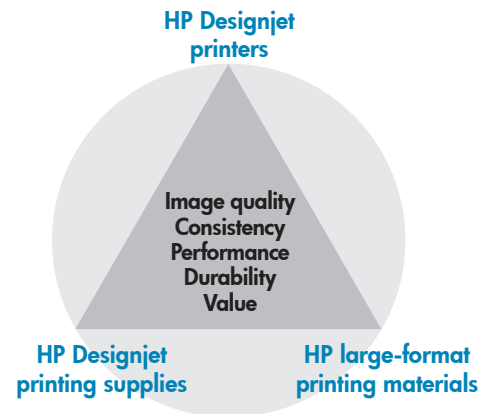

Applications

- Posters and presentations
- POP and retail displays
- Geographic Information Systems (GIS)
- Architecture (AEC) and engineering (MCAD)



HP UNIVERSAL HEAVYWEIGHT COATED PAPER

For the latest ICC/media profiles and a variety of resources to help you get the most out of your printer and HP large-format printing materials, please visit www.hp.com/go/HPmediaresources

TECHNICAL SPECIFICATIONS

WEIGHT	120 g/m ² per ISO 536 Test Method, (32 lbs)			
THICKNESS	155 microns/6.1 mil per ISO 534 Test Method			
OPACITY	Greater than 90% per TAPPI T-425 Test Method			
BRIGHTNESS	Greater than 95% per TAPPI T-452 Test Method			
WHITENESS	130 per CIE Ganz 82 Test Method			
FINISH	Matte			
OPERATING TEMPERATURE	15 to 30° C / 59 to 86° F			
OPERATING HUMIDITY	30 to 70% RH			
DRY TIME	Immediate (at 23° C, 50% RH)			
SHELF LIFE	2 years, unopened in original packaging			
STORAGE TEMPERATURE	5 to 40° C / 41 to 104° F			
STORAGE HUMIDITY	10 to 80% RH			
RECYCLABILITY	Recyclable through commonly available recycling programs			
COUNTRY OF ORIGIN	Product of Germany			
ORDERING INFORMATION	PRODUCT NUMBERS	ROLL SIZES	UPC CODES	REGION
	Q1412A ⁽¹⁾	610 mm x 30,5 m (24 in x 100 ft)	725184660269	North America, Europe, Asia
	Q1413A ⁽¹⁾	914 mm x 30,5 m (36 in x 100 ft)	725184660276	Worldwide
	Q1414A ⁽¹⁾	1067 mm x 30,5 m (42 in x 100 ft)	725184660283	North America, Europe, Asia
	Q1416A ⁽¹⁾	1524 mm x 30,5 m (60 in x 100 ft)	725184660306	North America, Europe, Asia
WARRANTY	Hewlett-Packard large-format printing materials are free of material or coating flaws and defects that affect the final use of the print and meet HP published specifications. For warranty statement please see www.hp.com/go/HPMediaWarranties . To obtain warranty service, please contact HP customer support.			

⁽¹⁾ Requires 2-inch spindle for compatibility with the HP Designjet L25500 Printer series.

For detailed information on the HP large-format printing materials portfolio and to order, see www.hp.com/go/lfp/Printing/materials-supplies

© 2010 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

