

HP Universal Adhesive Vinyl




HP Universal Adhesive Vinyl

An economical, everyday adhesive vinyl ideal for both indoor and outdoor applications, HP Universal Adhesive Vinyl delivers high-impact prints with great image quality and exceptional durability. Engineered to work together with HP Designjet printers, and dye and UV inks, this media is easy to use and apply, dries fast for quick post-print processing, and produces reliable prints, time after time.

Target customers

- PSPs
- copy shops
- sign shops

HP Designjet printing system The complete solution

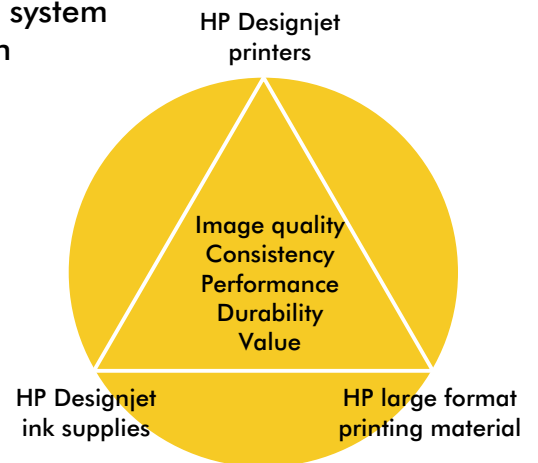

Applications

- POP and Retail Displays
- Banners

Benefits

- Outstanding versatility
- Exceptional durability
- Easy to use
- Outstanding image quality
- Reliable
- Economical

Printer/ink compatibility

Printer	Ink	Front panel setting
Designjet 4000/4000ps	HP 90	
Designjet 4500/4500ps/4500mfp/4500 Scanner	HP 90	
Designjet 5000/5000ps	HP 81 dye, HP 83 uv	
Designjet 5500/5500ps	HP 81 dye, HP 83 uv	
Designjet Z2100/Z3100	HP 70 Viverna pigment	
Designjet Z6100/Z6100ps	HP 91 Viverna pigment	

For the latest ICC/Media profiles, please visit www.hp.com/go/designjet/supplies/support (click on the ICC profiles and select your printer). For non-Post Script printers see your external RIP Vendor.

Product specifications

Property	Value and test method
Grammage	160 g/m ²
Thickness/caliper	5.5 mil/140 microns
Core size	2 in (50.8 mm)
CIE whiteness	90
Brightness	97%
Opacity	85%
Finish	Matte per ASTM D-523 Test Method
Country of Origin	Product of Switzerland
Waterfastness	Moderately water resistant with Original HP 91 Viverna pigment inks, lamination recommended

Image permanence

	Dye	Pigment
Fade resistance (indoor)+		2.6 years[2]
Fade resistance (commercial window)		1.5+ years unlaminated Original HP 91 Viverna pigment inks[1]

Fade resistance (outdoor)

+ For the 'Indoor' category, test results were achieved under glass unless otherwise indicated. [1]Indoor, Display permanence rating for interior displays/away from direct sunlight, under glass by HP Image Permanence Lab and/or by Wilhelm Imaging Research, Inc. For details: <http://www.hp.com/go/supplies/printpermanence>.

[2]Commercial Window,Interior in-window display ratings by HP Image Permanence Lab. HP predictions based on test data under Xenon-Arc illuminant—calculation assumes 6000 Lux/12 hr day. For details: <http://www.hp.com/go/supplies/printpermanence>.

Operating specifications

Operating temperature	15 to 30 ° C (59 to 86 ° F)
Operating humidity	20 to 70% RH
Dry time	Less than 3 minutes with 400% ink (@ 23°C, 50% RH)
Shelf life	1 year, unopened in original packaging

Finishing/post-processing

Lamination	Yes (Hot/Cold) Well suited for outdoor use, cold lamination recommended
Acid Free	

Ordering information

Q8676A	36 in x 66 ft (914 mm x 20 m)	NA, EMEA
Q8677A	42 in x 66 ft (1067 mm x 20 m)	NA, EMEA

Warranty Statement

Technical information contained in this document is subject to change without notice. © Copyright 2007 Hewlett-Packard Development Company, L.P. Hewlett-Packard large-format printing materials are guaranteed to meet HP published specifications, to be free of manufacturing flaws and defects, and are designed to resist paper jams when used correctly. If you are not satisfied with this product for any reason, please visit <http://www.hp.com/go/designjet/supplies>, and select HP product support center to locate product support in your region.

For information on similar products, please visit HP Designjet Supplies at <http://www.hp.com/go/designjet/supplies>

Last revised: 12/2007

